ST JAMES'S TERRACE

STANDARD HILL

STANDARD HILL

FRIAR LANE

FRI

Hounds Gate

LENTON ROAD

CASTLE ROAD

Notes:


TM Impact/Adjustments

- Standard Hill/Lenton Rd junction closed
- Castle deliveries via Park Estate
- Lenton Rd exit from park closed
- Friar Lane pay and display unaffected
- Exit from Standard Hill via Castle Road

Work Area

Traffic Movement

Bollards on Castle Road to be removed to allow exit from Standard Hill

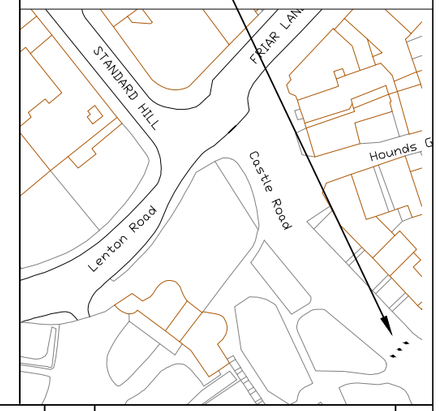

Rev.	Date	Details	Ch'd

Nottingham City Council

Highway Services

Capital Works
Eastcroft Depot
London Road
Nottingham
NG2 3AH
Telephone: 0115 915 2000
Fax: 0115 915 2100

Scheme

ERDF/Creative Quarter:
Castle Approach - Friar lane

Title

Construction Sequence Phase 1

CAD	Scale	Date
AB	NTS	01/04/2015
Drawn	**Checked**	**Authorised**
AB		

Drawing Number

CQFL/TM1

Revision